

Innovative AmpTip™ Jaws for Slim-Conductors In CAT-III 1000V Areas

Deluxe All-In-One AC/DC 1000A,
3-Terminal RST Phase-Rotation,
HVAC, AC+DC TRMS



BM080 Series

**AmpTip™ Jaws
Clamp-on DMMs**

World-wide Patented:

- D148257
- 1996509
- D678091S
- 402011006274.7
- M438628
- 2755507
- 13486915
- 202012102140.4
- M429871
- 2359464
- 202011052429.9



BRIGHT PEOPLE'S CHOICE
<http://www.brymen.com>



BM089



BM088



BM086




BM083

| 089 | 088 | 086 | 083 | FUNCTIONS & FEATURES |
|-----|-----|-----|-----|--|
| ● | ● | ● | ● | VFD-V & Hz for fundamental V/Hz of most Variable-Frequency-Drives |
| ● | ● | ● | ● | Fast measurement updates 3/sec |
| ● | ● | ● | ● | 3-5/6 digits 6,000 counts display large LCD |
| ● | ● | | | 51mm conductor size Hall-effect 1000A DC/AC jaws |
| | | ● | ● | 51mm conductor size Ultra-slim 1000A AC jaws |
| ● | ● | ● | ● | AmpTip™ Low-current-range calibrated at Jaw-tip for slim-conductors |
| ● | ● | AC | AC | AC+DC, AC True RMS voltage and current functions |
| ● | ● | ● | ● | 1000VAC/DC input protection on general functions |
| ● | ● | ● | ● | Auto Power Off |
| ● | ● | ● | ● | Data HOLD |
| ● | ● | ● | ● | Record MAX/MIN/AVG mode (Auto-ranging) |
| ● | ● | ● | ● | Relative mode (Auto-ranging) with DC-Zero mode on DCA, DC+ACA ranges |
| ● | ● | ● | | Fast 80ms PEAK-RMS mode to capture in-rush currents |
| ● | ● | ● | | 5ms CREST mode to capture instantaneous +Peak & -Peak |
| ● | ● | ● | ● | Back-lighted easy-to-read LCD display |
| ● | ● | | | Flashlight for easy operation in dim areas |
| ● | ● | ● | ● | Non-Contact EF-Detection (NCV) |
| ● | ● | ● | ● | Probe-Contact EF-Detection for more precise indication of live |
| ● | | ● | | Ⓡ 3Φ-Rotation-R for MAINS supply (Probe-contact) |
| ● | | ● | | Ⓢ 3Φ-Rotation-M (Hi-sensitivity mode) for Motors (Probe-contact) |
| ● | | ● | | Type-K temperature -40.0°C to 400°C or -40.0°F to 752°F selectable |
| ● | | ● | | DCμA ranges 200.0μA to 2000μA (via leads) for HVAC flame sensors |
| ● | ● | | | DC+ACA ranges 60.00A to 1000A + AmpTip™ DC+ACA 60.00A range |
| ● | ● | | | DCA ranges 60.00A to 1000A + AmpTip™ DCA 60.00A range |
| ● | ● | ● | ● | ACA ranges 60.00A to 1000A + AmpTip™ ACA 60.00A range |
| ● | ● | | | DC+ACV ranges 600.0V to 1000V |
| ● | ● | ● | ● | DCV ranges 600.0V to 1000V |
| ● | ● | ● | ● | ACV ranges 600.0V to 1000V |
| ● | ● | ● | ● | Ohm ranges 600.0Ω to 60.00kΩ |
| ● | ● | ● | ● | Cx ranges 200.0μF to 2500μF for start & run motor capacitors |
| ● | ● | ● | ● | Diode test & Fast audible Continuity |
| ● | ● | ● | ● | Line-level ACV Frequency 5.00Hz to 999.9Hz |
| ● | ● | ● | ● | Soft carrying pouch |
| ● | ● | ● | ● | Rugged fire retarded casing with battery access door |
| ● | ● | ● | ● | Transient protection 8kV 1.2/50μs lightning surge |
| ● | ● | ● | ● | LVD EN61010-1/61010-2-032/61010-2-033 to CAT III 1000V & Cat IV 600V |
| ● | ● | ● | ● | EMC EN61326-1 (EN55022, EN61000-3-2/-3 & EN61000-4-2/-3/-4/-5/-6/-8/-11) |

Patented AmpTip™ Jaws & Phase Rotation! DC+AC 1000A! CAT III 1kV!

Advanced Safety Compliance with IEC 61010-2-032 3rd Edition and IEC 61010-2-033 1st Edition
Investigated, Tested and Listed by UL, a global independent safety science company

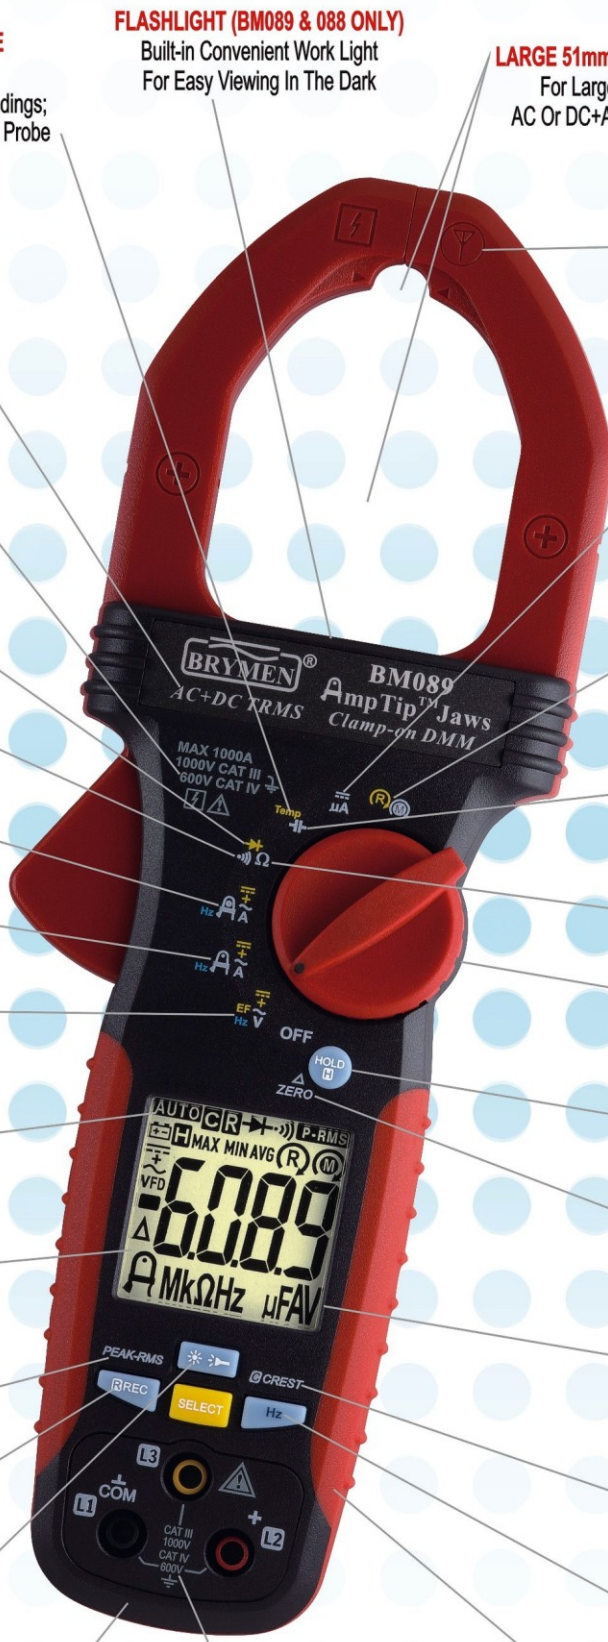

TYPE-K TEMPERATURE (BM089 & 086 ONLY)
Selectable °C And °F Readings;
Comes With Bkp60 Bead Probe

FLASHLIGHT (BM089 & 088 ONLY)
Built-in Convenient Work Light
For Easy Viewing In The Dark

LARGE 51mm AmpTip™ CLAMP JAWS
For Large & Small Conductors With
AC Or DC+AC TRMS 1000A Capability

AC+DC TRUE RMS MEASUREMENTS (BM089 & 088 ONLY)
For Non-sinusoidal & Complex
Waveforms Of Voltages & Currents

EF-DETECTION
Both Non-Contact (NCV) &
Single-Probe Voltage Detection
For Identifying Live Lines

LVD CAT III 1KV & CAT IV 600V
Certified EN61010-2-032, EN61010-2-033,
EN61010-1 & Relevant UL Standards On
CAT III 1000V & CAT IV 600V

DC_μA (BM089 & 086 ONLY)
For HVAC Flame Sensors
Testing Via Test Probes

DIODE TEST
For Testing Diodes & Rectifiers

PHASE ROTATION (BM089 & 086 ONLY)
Dual Sensitivity Modes For
Both Motors And Supply Systems

FAST AUDIBLE CONTINUITY
For Quick Open-short Tests
On Switches, Fuses, And Wires

REGULAR CURRENT & Hz
Measures At Jaw Center For
Regular Conductors Up To 1000 Amps

CAPACITANCE
2 Auto-ranges Up To 2500 μ F
To Measure Motor Capacitors

AmpTip™ LOW-CURRENT & Hz
Ergonomically Measures At Jaw Tip For
Small-sized Conductors Up To 60 Amps

RESISTANCE
3 Auto-ranges Up To 60k Ω
Best Resolution 0.1 Ω At 600 Ω Range

VFD V & Hz FEATURE
Measures Fundamental
Voltage & Frequency Of Most
Variable Frequency Drives

ERGONOMIC & STREAMLINE BODY
Also Comes With A Soft Pouch
For Easy Carrying & Protection

FULLY AUTO-RANGING DMM
Shortens The Time To Measure
And Increases The Ease Of Use

DATA HOLD
Freezes The Displaying
Reading For Later View

AUTO-POWER-OFF
Extends Battery Life

RELATIVE ZERO & DC_ZERO
For Convenient Readings Comparison
As Well As DC Jaws Hysteresis Offset

IN-RUSH PEAK-RMS (BM089, 088, 086 ONLY)
Captures In-rush Peak RMS Readings
At Durations As Short As 80ms

0.8% DCV BASIC ACCURACY
DCV 2 Auto-ranges To 1000V;
ACV 2 Auto-ranges To 1000V

RECORD MAX / MIN / AVG
Records Max, Min, & Calculates Avg
Readings Over Time. Auto-ranging

5ms CREST-MAX
Captures In-rush Peak Signals Of ACA
Or ACV As Short As 5ms In Duration

BACKLIGHTED LCD DISPLAY
For Easy Viewing In The Dark

CONVENIENT Hz BUTTON
Toggles Between Amps & Hz Via Jaws,
Or Volts & Hz Via Test Probes

EMC
Meets EN61326-1:2006 (EN55022,
EN61000-3-2/3 & EN61000-4-2/3/4/5/6/8/11)

TRANSIENT PROTECTION
Up To 8kV 1.2/50 μ s Lightning Surge;
More Confidence For Serious Users

RUGGED & DURABLE
High-impact Fire-retarded
Enclosure With Battery
Compartment & Access Door

GENERAL SPECIFICATIONS

Display: 3-5/6 digits 6000 counts.
Polarity: Automatic
Update Rate: 5 per second nominal;
Operating Temperature: -10°C to 50°C
Relative Humidity: Non condensing ($\leq 10^\circ\text{C}$)
 $\leq 90\% \text{ RH}$ (at $10\text{--}30^\circ\text{C}$)
 $\leq 75\% \text{ RH}$ (at $30\text{--}40^\circ\text{C}$)
 $\leq 45\% \text{ RH}$ (at $40\text{--}50^\circ\text{C}$)
Pollution degree: 2
Storage Temperature: -20°C to 60°C, < 80% R.H. (with battery removed)
Altitude: Operating below 2000m; Storage below 12000m
Temperature Coefficient: nominal 0.10 x (specified accuracy) / °C @ (-10°C -- 18°C or 28°C -- 50°C), or otherwise specified
Sensing: True RMS
Safety: Double insulation per UL/IEC/EN61010-1 Ed. 3.0, IEC/EN61010-2-033 Ed. 1.0, CAN/CSA C22.2 No. 61010-1 Ed. 3.0, IEC/EN61010-2-032 Ed. 3.0 & IEC/EN61010-031 Ed. 1.1 to CAT III 1000V and CAT IV 600V AC & DC

Electrical Specifications

Accuracy is \pm (% reading digits + number of digits) or otherwise specified, at 23°C \pm 5°C.
 Maximum Crest Factor < 2.5 : 1 at full scale & < 5 : 1 at half scale or otherwise specified, and with frequency spectrum not exceeding the specified frequency bandwidth for non-sinusoidal waveforms.

DC Voltage

| RANGE | Accuracy |
|---------------|-----------|
| 600.0V, 1000V | 0.8% + 5d |

Input Impedance: 10M Ω , 100 pF nominal

AC Voltage (with Digital Low-Pass Filter)

| RANGE | Accuracy |
|---------------|-----------|
| 50Hz ~ 60Hz | |
| 600.0V, 1000V | 0.8% + 5d |
| 20Hz ~ 200Hz | |
| 600.0V, 1000V | 1.5% + 5d |
| 200Hz ~ 400Hz | |
| 600.0V, 1000V | 10% + 5d |

Input Impedance: 10M Ω , 100 pF nominal

DC+AC Voltage (with Digital Low-Pass Filter) (BM089 & BM088 Only)

| RANGE | Accuracy |
|------------------|-----------|
| 50Hz ~ 60Hz | |
| 600.0V, 1000V | 1.0% + 7d |
| DC, 40Hz ~ 200Hz | |
| 600.0V, 1000V | 1.8% + 7d |
| 200Hz ~ 400Hz | |
| 600.0V, 1000V | 12% + 7d |

Input Impedance: 10M Ω , 100 pF nominal

PEAK-rms (ACV & ACA of Models 089, 088 & 086 only)
 Response: 80ms to > 90%

CREST (Peak-Hold)

Accuracy: Add 250 digits to specified accuracy for changes > 5ms

Audible Continuity Tester

Audible Threshold: At between 10 Ω and 250 Ω
 Response time: 32ms approx.

Ohm

| RANGE | Accuracy |
|--|-----------|
| 600.0 Ω , 6.000K Ω , 60.00K Ω | 1.0% + 5d |

Open Circuit Voltage: 1.0VDC typical

Capacitance

| RANGE | Accuracy ¹⁾ |
|--|------------------------|
| 200.0 μF , 2500 μF | 2.0% + 4d |

¹⁾Accuracies with film capacitor or better

Diode Tester

| RANGE | Accuracy |
|--------|-----------|
| 2.000V | 1.5% + 5d |

Test Current: 0.3mA typically
 Open Circuit Voltage: < 3.5VDC typically

DC μA (BM089 & BM086 only)

| RANGE | Accuracy | Burden Voltage |
|--|-----------|----------------------|
| 200.0 μA , 2000 μA | 1.0% + 5d | 3.5mV/ μA |

Transient Protection: 8.0kV (1.2/50 μs surge)

Overload Protections:

Current & Hz functions via jaws: 1000ADC/AAC rms at <400Hz
 Voltage & 3-Phase Rotation functions via terminals: 1100VDC/VAC rms

Other functions via terminals: 1000VDC/VAC rms
E.M.C.: Meets EN61326-1:2006 (EN55022, EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11);
 ACA, DCA & DC+ACA Functions, in an RF field of 1V/m:
 Total Accuracy = Specified Accuracy + 60 digits at around 200MHz~350MHz
 Ohm and DC μA Functions, in an RF field of 1V/m:
 Total Accuracy = Specified Accuracy + 80 digits
 Other Functions, in an RF field of 3V/m:
 Total Accuracy = Specified Accuracy + 20 digits
Power Supply: 1.5V AA Size battery X 2
Power Consumption: Typical 13mA for Current functions of BM089 & BM088; 4.3mA for others
Low Battery: Below approx. 2.85V for Capacitance & Hz;

Below approx. 2.5V for other functions

AP0 Timing: Idle for 32 minutes

AP0 Consumption: 5 μA typical

Dimension: L256mm X W94mm X H44mm

Weight: 392gm for BM088 & BM089; 312gm for BM083 & BM086

Jaw opening & Conductor diameter: 51mm max
Accessories: Test lead set, User's manual, Soft carrying pouch, Bkp60 banana plug K-type thermocouple (BM089 & BM086 only), Alligator clip set (BM089 & BM086 only)
Optional purchase accessories: BKB32 banana plug to type-K socket plug adaptor (BM089 & BM086 only)
Special Features: AmpTip™ low-current range; MAX/MIN/AVG Recording mode; Display Hold; EF-Detection (NCV); Backlight LCD; Flashlight (BM089 & BM088 only); 80ms Peak-RMS mode for inrush current (BM089, BM088 & BM086 only); 5ms Crest (Instantaneous Peak-Hold) mode (BM089, BM088 & BM086 only); Relative-Zero, 3-Phase Rotation detection (BM089 & BM086 only)

Temperature (BM089 & BM086 only)

| RANGE | Accuracy |
|-------------------|--------------|
| -40.0°C ~ 99.9°C | 1.0% + 0.8°C |
| 100°C ~ 400°C | 1.0% + 1°C |
| -40.0°F ~ 211.8°F | 1.0% + 1.5°F |
| 212°F ~ 752°F | 1.0% + 2°F |

K-type thermocouple range & accuracy not included

AmpTip™ clamp-on ACA

| RANGE | Accuracy ^{1) 2) 3)} |
|---------------|------------------------------|
| 40Hz ~ 100Hz | |
| 60.00A | 1.5% + 5d |
| 100Hz ~ 400Hz | |
| 60.00A | 2.0% + 5d |

¹⁾Induced error from adjacent current-carrying conductor: <0.02A/A
²⁾Specified with Relative Zero Δ mode applied to offset the non-zero residual readings, if any
³⁾Add 10d to the specified accuracy @ < 4A

AmpTip™ clamp-on DCA (BM089 & BM088 only)

| RANGE | Accuracy ^{1) 2) 3)} |
|--------|------------------------------|
| 60.00A | 1.5% + 5d |

¹⁾Induced error from adjacent current-carrying conductor: <0.02A/A
²⁾Specified with DC-Zero mode applied to offset the non-zero residual readings, if any
³⁾Add 10d to the specified accuracy @ < 4A

AmpTip™ clamp-on DC+ACA (BM089 & BM088 only)

| RANGE | Accuracy ^{1) 2) 3)} |
|------------------|------------------------------|
| DC, 40Hz ~ 100Hz | |
| 60.00A | 2.0% + 7d |
| 100Hz ~ 400Hz | |
| 60.00A | 2.2% + 7d |

¹⁾Induced error from adjacent current-carrying conductor: <0.08A/A
²⁾Specified with DC-Zero mode applied to offset the non-zero residual readings, if any
³⁾Add 10d to the specified accuracy @ < 4A

Regular Clamp-on ACA

| RANGE | Accuracy ^{1) 2)} |
|---|---------------------------|
| 40Hz ~ 100Hz | |
| 60.00A ^{3) 4)} , 600.0A, 1000A ⁵⁾ | 1.8% + 5d |
| 100Hz ~ 400Hz | |
| 60.00A ^{3) 4)} , 600.0A, 1000A ⁵⁾ | 2.2% + 5d |

¹⁾Induced error from adjacent current-carrying conductor: < 0.02A/A for Models 089 & 088 < 0.05A/A for Models 086 & 083
²⁾For Models 086 & 083, specified accuracy is for measurements made at the jaw center. When the conductor is not positioned at the jaw center, add 2% to specified accuracy for position errors
³⁾For Models 086 & 083, add 10d to specified accuracy @ < 6A
⁴⁾For Models 089 & 088, add 10d to the specified accuracy @ < 9A
⁵⁾Maximum Crest Factor < 1.4 : 1 at full scale & < 2.8 : 1 at half scale

Regular Clamp-on DCA (BM089 & BM088 only)

| RANGE | Accuracy ^{1) 2)} |
|--------------------------------------|---------------------------|
| 60.00A ³⁾ , 600.0A, 1000A | 1.8% + 5d |

¹⁾Induced error from adjacent current-carrying conductor: <0.02A/A
²⁾Specified with DC-Zero mode applied to offset the non-zero residual readings, if any
³⁾Add 10d to the specified accuracy @ < 9A

Regular Clamp-on DC+ACA (BM089 & BM088 only)

| RANGE | Accuracy ^{1) 2)} |
|--|---------------------------|
| DC, 40Hz ~ 100Hz | |
| 60.00A ³⁾ , 600.0A, 1000A ⁴⁾ | 2.2% + 7d |
| 100Hz ~ 400Hz | |
| 60.00A ³⁾ , 600.0A, 1000A ⁴⁾ | 2.5% + 7d |

¹⁾Induced error from adjacent current-carrying conductor: < 0.08A/A
²⁾Specified with DC-Zero mode applied to offset the non-zero residual readings, if any
³⁾Add 10d to the specified accuracy @ < 9A
⁴⁾Maximum Crest Factor < 1.4 : 1 at full scale & < 2.8 : 1 at half scale

HZ Line Level Frequency

| Function | Sensitivity ¹⁾ (Sine RMS) | Range |
|------------------|--------------------------------------|-------------------|
| 600V, 1000V | 50V | 5.00Hz ~ 999.9Hz |
| 60A (AmpTip™) | 40A | 40.00Hz ~ 400.0Hz |
| 60A, 600A, 1000A | 40A | 40.00Hz ~ 400.0Hz |

Accuracy: 1%+5d
¹⁾DC-bias, if any, not more than 50% of Sine RMS

Non-Contact EF-Detection

| Typical Voltage | Bar-Graph Indication |
|--------------------------------|----------------------|
| 20V (tolerance: 10V ~ 36V) | - |
| 55V (tolerance: 23V ~ 83V) | -- |
| 110V (tolerance: 59V ~ 165V) | --- |
| 220V (tolerance: 124V ~ 330V) | ---- |
| 440V (tolerance: 250V ~ 1000V) | ----- |

Indication: Bar-graph segments & audible beep tones proportional to the field strength
 Detection Frequency: 50/60Hz
 Detection Antenna: Inside the top side of the stationary jaw
 Probe-Contact EF-Detection: For more precise indication of live wires, such as distinguishing between live and ground connections, use one single probe to test via terminal COM for direct contact EF-Detection with best sensitivity.



BRYMEN TECHNOLOGY CORPORATION

http://www.brymen.com
 TEL: +886 2 2226 3396 (rep)
 FAX: +886 2 2225 0025
 Copyright © MMXIII B.T.C. All rights reserved
 Specifications subject to change without notice
 Patents pending. Printed in Taiwan