

NEW




Quality and reliability is our tradition

KYORITSU

FLEXIBLE CLAMP METER KEW 2210R

**The best 3000A AC clamp meter
suitable for a hard-to-clamp crowded wiring places**

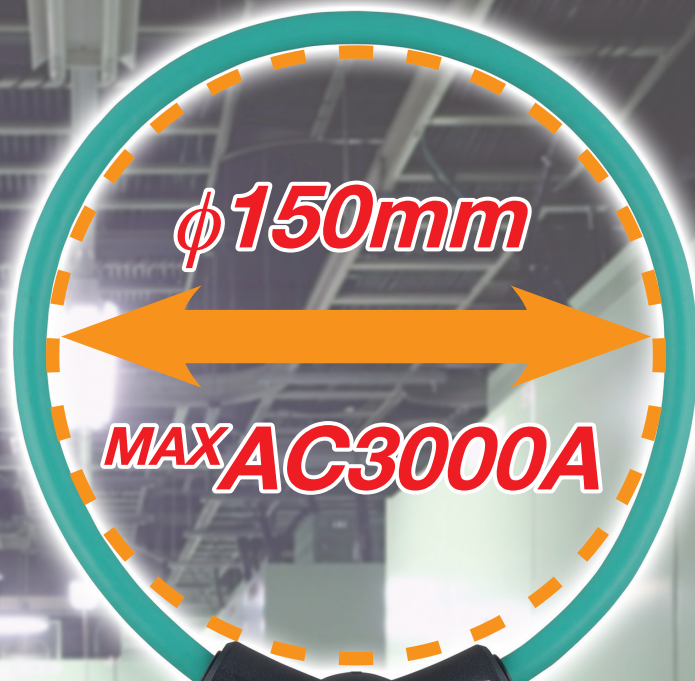

TRUERMS

- Flexible and light weight clamp sensor
- Wide reading range up to 3000A
- True RMS
- MIN / MAX function
- Backlight LCD display
- IEC 61010-1 (CAT III 1000V / CAT IV 600V)



● KEW 2210R Specifications


| | |
|----------------------------------|--|
| AC A (RMS) | |
| Range | 30.00 / 300.0 / 3000A |
| Accuracy | ±3%rdg±5dgt(45~500Hz) (At the center of the circle formed by the flexible sensor) |
| Conductor size | ø150mm max. |
| Influence of Conductor position | Additional ±3%(max) depending on the distance from the center position |
| Overload Protection | 5000A AC for 10 seconds |
| Applicable standards | IEC61010-1, IEC61010-2-030 CAT III 1000V / CAT IV 600V Pollution degree 2 IEC61010-2-032, IEC61326-1(EMC) IEC60529 IP40 |
| Operating temperature & humidity | 0 - +50°C, less than 80% RH (without condensation) |
| Storage temperature & humidity | -10 - +60°C, less than 70% RH (without condensation) |
| Power source | R03/LR03(AAA)(1.5V) x2 *Continuous measuring time : approx. 120 hours (Auto power off : approx. 15 minutes) |
| Dimension | 120(L)x70(W)x26(D)mm : Display unit 1.8m : Sensor cable |
| Weight | Approx. 300g (including batteries) |



Easy to use in crowded cable areas



Easy to clamp a wire in hard-to-reach narrow spaces

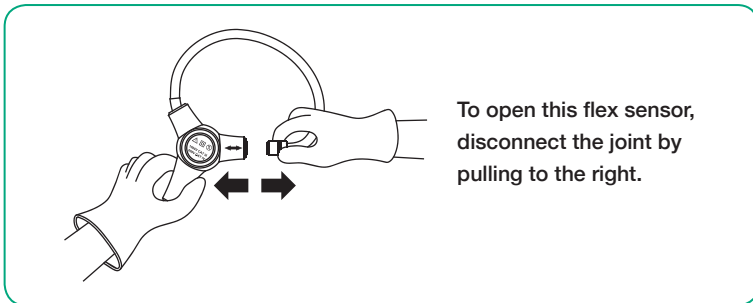

To open this flex sensor, disconnect the joint by pulling to the right.

● Included Accessories



Easy to read backlight LCD display



Safety Warnings :

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.