


PROVA[®]

PROVA 1011

Solar System Analyzer



CE CAT II 1000V
CAT III 300V

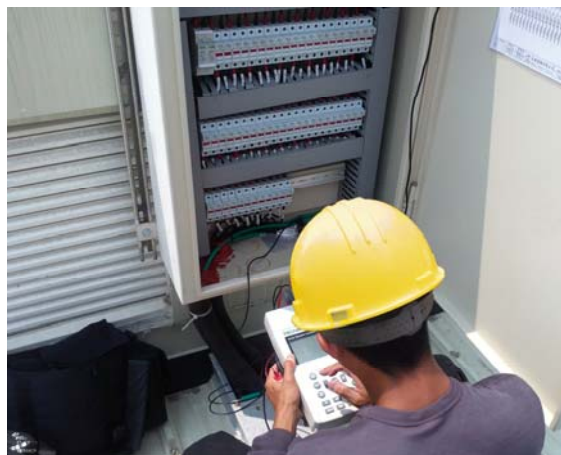

Features:

- **I-V curve test** for solar system.
- Max. solar system power (Pmax) search by Auto-scan: **1000V, 12A (12000W capability)**.
- The analyzer and the Remote Solar Detector is connected by **Bluetooth wireless** communication (Bluetooth 2.1 + EDR Class 1).
- The Remote Solar Detector is **moisture-proof**.
- **Intelligent test logic** with no personnel attendance required in the field. Solar system analyzer waits and tests the system until appropriate sunlight irradiance is detected.
- Max. voltage (**V_{pm}**) at Pmax; Max. current (**I_{pm}**) at Pmax.
- Voltage at open circuit (**V_{oc}**); Current at short circuit (**I_{sc}**).
- **Efficiency (%)** calculation of solar system.
- **Temperature** measurement of solar panels.

- **Irradiance** measurement of sun light.
- **Series resistance** (R_s) calculation of solar panels.
- **I-V curve with cursor** to display each data point.
- With **data logging/open** function, the I-V curves of solar system can be analyzed/recorded for a period of time (e.g. 60 min.).
- **Conversion of I-V curve** under OPC to data under standard test condition (STC) based upon **IEC standard**
- Provide Operating Condition (**OPC**) and Standard Test Condition (**STC**) test reports for verification of solar panel performance (**OK**, or **NO OK**).
- Users can set up the **parameters** of solar panels; users can set up the **series numbers** of solar panels. Parameters of many solar panels can be measured in **one measurement**.
- **Irradiances & temperatures** of solar panels can be continuously measured, monitored and recorded.
- Built-in **calendar clock**.
- **Rechargeable lithium battery**, low battery warning; **AC power adaptor**.
- Optical **USB cable** for PC.
- With **OPTIONAL** power clamps (**SOLAR 15** DC Current Probe and **SOLAR 21** AC Power Clamp), continuously **measure/monitor/record** the **DC power** output of solar system and the **AC power** output of inverter (1 phase or balanced 3 phases); calculate the efficiency of **DC to AC power conversion** and the efficiency of the **max. output power**.

Electrical Specifications:

(23°C±5°C, Irradiance ≥ 800 W/m², 4-wire measurement, Max. power limit is 12000W)

DC Voltage Measurement:

| Range | Resolution | Accuracy |
|------------|-------------------|--------------------------|
| 1 ~ 1000 V | 0.01V / 0.1V / 1V | ±1% ± (1% of Voc ± 0.1V) |

Voc: open circuit voltage of solar cell or module.

DC Current Measurement:

| Range | Resolution | Accuracy |
|------------|------------|-------------------------|
| 0.1 ~ 12 A | 1mA / 10mA | ±1% ± (1% of Isc ± 9mA) |

Isc: short circuit current of solar cell or module.

DC Current Simulation

| Range | Resolution | Accuracy |
|------------|------------|-----------|
| 0.1 ~ 12 A | 1mA / 10mA | ±1% ± 9mA |

Irradiance Measurement

| Range | Resolution | Accuracy |
|---------------------------|--------------------|-----------------|
| 0 ~ 2000 W/m ² | 1 W/m ² | ± 3 % ± 20 dgts |

Temperature Measurement

| Range | Resolution | Accuracy |
|-------------|------------|--------------|
| -22 ~ 85 °C | 0.1 °C | ± 1 % ± 1 °C |

General Specifications:

| | |
|--------------------------|--|
| Battery Type: | Rechargeable Lithium Battery (3400mAh) |
| Battery Life: | 400 times of linear scan (1000V ~ 1V, 0.1A ~ 12A), 8 hours for standby mode |
| Memory Size: | 512K Bytes (3980 Mod files or 320 REC files or 3980 PWR files or 3980 IRR files) |
| AC Power Adaptor: | AC 100 ~ 240V input DC 15V / 1~3A output |
| Dimension: | 257(L) x 155(W) x 57(H) mm |
| Weight: | 1525g / 53.7 oz (Batteries included) |
| Operation Environment: | 5°C ~ 50°C, 85% RH |
| Temperature Coefficient: | 0.1% of full scale / °C (<18°C or >28°C) |
| Storage Environment: | -20°C ~ 60°C, 75% RH |
| Accessories: | Remote Solar Detector (battery type: rechargeable lithium battery, 1000mAh) with Thermometer USB power cord User manual AC power adaptor Optical USB cable Software CD Software manual Rechargeable lithium battery (3400mAh) Carrying bag Thermal conductive gel Testing clips (1 black & 1 red) 4-wire to 2-wire connecting cable 4-wire testing cable |
| Option: | Solar 15: DC current probe Solar 21: AC power clamp Testing clips (1 black & 1 red) |

Option:

SOLAR 15

DC Current Probe



Electrical Specifications: (23°C±5°C)

DC Current Measurement:

| Range | Resolution | Accuracy |
|--------|------------|------------|
| DC 12A | 1mA / 10mA | ±2.0%±30mA |

General Specifications:

| | |
|-------------------------|--|
| Conductor Size: | 23mm max. (approx.) |
| Battery Type: | Two 1.5V SUM-3 AA |
| Range Selection: | Manual |
| Power Consumption: | 10mA (approx.) |
| Low Battery Indication: | Red LED |
| Dimension: | 183 (L) x 61.3 (W) x 35.6 (H) mm 7.2" (L) x 2.5" (W) x 1.4" (H) |
| Weight: | 190g (Batteries included) |
| Operation Environment: | -10°C ~ 50°C, < 85% RH |
| Altitude: | Up to 2000M |
| Storage Environment: | -20°C ~ 60°C, < 75% RH |
| Accessories: | User manual Carrying bag 1.5V AA battery x 2 |

Option:

SOLAR 21

AC Power Clamp



Electrical Specifications: (23°C±5°C)

AC Watt

| Range (0 ~ 30A) | Resolution | Accuracy of Readings |
|------------------|------------|----------------------|
| 0.050 – 9.999 W | 0.001W | ±2% ± 0.025W |
| 10.00 – 99.99 W | 0.01W | ±2% ± 0.25W |
| 100.0 – 999.9 W | 0.1W | ±2% ± 2.5W |
| 1.000 – 9.999 KW | 0.001 KW | ±2% ± 0.025KW |
| 10.00 – 99.99 KW | 0.01 KW | ±2% ± 0.25KW |
| 100.0 – 999.9 KW | 0.1 KW | ±2% ± 2.5KW |
| 1000 – 9999 KW | 1 KW | ±2% ± 25KW |
| Range (30 ~ 50A) | Resolution | Accuracy |
| 0.050 – 9.999 W | 0.001W | ±2% of VA ± 5dgt |
| 10.00 – 99.99 W | 0.01W | |
| 100.0 – 999.9 W | 0.1W | |
| 1.000 – 9.999 KW | 0.001 KW | |
| 10.00 – 99.99 KW | 0.01 KW | |
| 100.0 – 999.9 KW | 0.1 KW | |
| 1000 – 9999 KW | 1 KW | |

Range of CT Ratio: 1 to 250

H.P. (Horse Power): 1 H.P. = 746 W

AC Apparent Power (VA, from 0.000VA to 9999 KVA)

$$VA = V \text{ r.m.s.} \times A \text{ r.m.s}$$

AC Reactive Power (VAR, from 0.000 VAR to 9999 KVAR)

$$VAR = \sqrt{(VA^2 - W^2)}$$

AC Active Energy (mWH, WH, or KWH, from 0 mWH to 999,999 KWH)

$$WH = W \times \text{Time (in hours)}$$

Power Factor

| Range | Resolution | Accuracy |
|---------------|------------|----------|
| 0.000 – 1.000 | 0.001 | ±0.04 |

General Specifications:

| | |
|---|--|
| Conductor Size: | 30mm max. (approx.) |
| Battery Type: | Two 1.5V SUM-3 AA |
| Display: | 4+2+2 digits LCD |
| Range Selection: | Auto |
| Overload Indication: | OL |
| Power Consumption: | 10mA (approx.) |
| Low Battery Indication: | <input type="checkbox"/> B |
| Display Update Time: | 2 times / sec. |
| No. of Samples per period: | 512 (V or A) 256 (W) |
| Temperature Coefficient (<18°C or >28°C): | 0.15 x (Specified Accuracy) / °C |
| Dimension: | 210 (L) x 62 (W) x 35.6 (H) mm 8.3" (L) x 2.5" (W) x 1.4" (H) |
| Weight: | 200g (Batteries included) |
| Operation Environment: | -10°C ~ 50°C, < 85% RH |
| Altitude: | Up to 2000M |
| Storage Environment: | -20°C ~ 60°C, < 75% RH |
| Accessories: | Test leads User Manual Carrying bag 1.5V AA battery x 2 |
| Option: | Alligator clips |

REGIONALNE BIURO HANDLOWE

03-450 WARSZAWA, ul. Ratuszowa 11 p.68
tel.: +48 22 211-13-03, fax: +48 22 211-13-04
kom. +48 505 107 957 e-mail: warszawa@biall.com.pl

SIEDZIBA GŁÓWNA, SPRZEDAŻ

80-299 GDANSK, ul. Barniewicka 54c
tel./fax: +48 58 322-11-91, 92, 93
e-mail: biall@biall.com.pl

BIALL Sp. z o.o.
www.biall.com.pl

