

TENMARS

Air Velocity Meter
TM-401/402/403/404
User Manual



CE

Oct 2009 Rev. 0.1
©2009 TENMARS Corporation. All rights reserved.

HB2TM4010000

Table of Contents


Introduction.....	1
Features.....	1
Functions Cross table.....	2
Air Velocity Meter Features.....	4
Display Features.....	6
Power On/Off.....	7
Auto Shutoff.....	7
LED Backlight.....	8
Auto Backlight On/Off.....	9
Air Velocity Measures.....	11
Change Secondary Display Mode.....	13
Change Units.....	13
Air Flow Calculation.....	15
Setting Area.....	15
MAX/MIN/AVG record:.....	17
Freeze Display (HOLD).....	17
99 Records.....	18

Clear Memory.....	19
Memory Recall.....	20
Battery Replacement.....	22
Specifications.....	23

Introduction

TM-40X series measures air speed ,temperature and humidity. It is ideal for spot measurements at air outlets on account of its 30mm vane. In addition to air speed and temperature, TM-404 also measures air moisture and absolute pressure. In this way, air conditions can be reliably checked.

Features

- ▪30mm 6 plastics blade
- ▪Light air response 0.4m/s
- ▪Air flow calculate function.
- ▪Max/Min/Avg and data hold.
- ▪Auto power off with disable function.
- ▪Low battery indication. “”
- ▪Low battery indication.
- ▪Datalogging capacity: 99 records.

- ▪Memory recall function.
- ▪Backlight function.
- ▪Absolute Pressure Sensor
- ▪Humidity Sensor

Functions Cross table

	Velocity	Flow	99 Record	Temperature	Humidity	Pressure
--	----------	------	-----------	-------------	----------	----------


TM-401 (with Pr401)	•	•	•			
TM-402 (with Pr401T)	•	•	•	•		
TM-403 (with Pr401H)	•	•	•	•	•	
TM-404 (with Pr401H)	•	•	•	•	•	•

Air Velocity Meter Features




1. HOLD and Recall key
2. ESC and Rec key
3. Max, Min and AVG key
4. Select up and Auto shutoff key
5. Enter and Unit change key
6. Select down and Power key
7. backlight and Set Key
8. Display and Backlight
9. Probes input
10. Battery placement
11. Battery cover
12. Probes Plug
- 13 Probes hold
- 14 Probes sensor (Temperature/Humidity)
- 15 Blades
- 16 Internal Pressure Sensor (TM-404)

Display Features

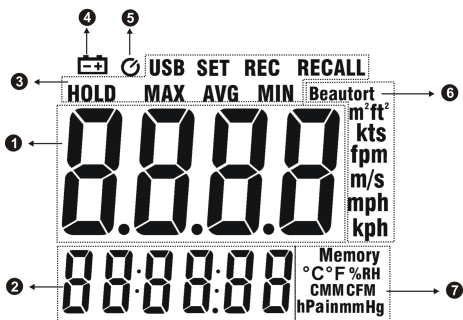

1. Primary display
2. Secondary display
3. Functional symbol display area
4. Lower battery indication.
5. Auto shutoff symbol indication.
6. **Units of Primary display**
7. **Units of Secondary display**

Power On/Off


In the shutoff mode Press  key to turn on the power.

If want to turn off Press and hold  key.

In the Set ,Unit change and recall mode can not turn off the power.


Auto Shutoff

The device will auto shutoff if there is no action for 15 minutes.

If want to disable or enable the auto power off function, please press and hold  key.








In the Set ,Unit change and recall mode can not change this.

LED Backlight

When press  key to turn on backlight. Press key to turn off again. The backlight will turn off of after 30 seconds.

Auto Backlight On/Off


Users can set on or off the 30-seconds auto-off backlight

Press and hold  key into setting mode. Press  and  key to select BLIGHT setting, as shown in figures. Press  key into Backlight setting. Press  and  key to select auto off on or off. Press  key to finish and leave setting mode.



Air Velocity Measures

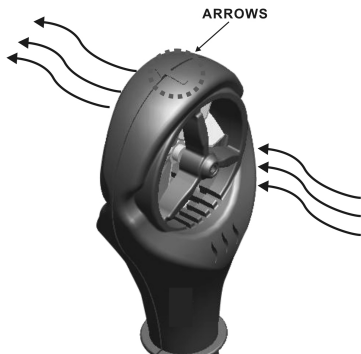

1. Please insert probe plug into the device sensor input socket.
2. Follow the arrows to measure velocity. As shown in figures.



- Please don not touch the blades by fingers or foreign body to avoid damage to the *blades*.








Change Secondary Display Mode

In the normal mode, Press  and  key to change secondary display mode.

□ *In the Humidity mode need to waiting minutes to acquire accuracy humidity reading.*

Change Units


Press and hold  key into the setting units mode. If want to change the secondary display units, please press and hold  key again.




When in the setting units mode, LCD blink the choose unit. Press  and  key to change the units and press  key to finish and leave setting mode.





Air Flow Calculation


When secondary display in the flow mode (CMM/CFM), the device will calculate flow by the users key in area volume.


Setting Area

Press and hold  key into the setting mode.

Press  and  key to select setting area mode, **as shown in figures**. Press  key into the setting area mode.

From left to right to set the digits, and press  and  key to adjust digits to left or right. Press  and  key to increase and decrease volume through last right digits.

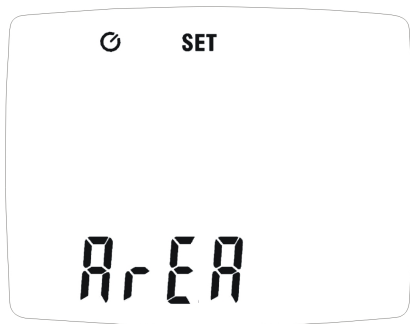

Users can press and hold  key to change area units (m^2 / ft^2).




- The units(m^2) maximum volume is $1.5 m^2$, and minimum volume is $0.096 m^2$.
- The units (ft^2) maximum volume is $16.15 ft^2$, and minimum volume is $1.03 ft^2$.

MAX/MIN/AVG record:



This function can record maximum, minimum and average.

User can select viewing. Press  key to start record MAX, MIN, and AVG. Show the max reading to display. Press  key to switch viewing between MAX, AVG and MIN.

Press and hold  key to disable this function.

In the Set ,Unit change and recall mode can not used this function.


Freeze Display (HOLD)

Users can press  key to freeze display, and press  key again to release display.

In the Set ,Unit change and recall mode can not used this function.

99 Records


Device can storage air velocity data up to 99 records.



Press  key to storage once record data, and shown memory location on the LCD about 1 second.


□ *When the enable HOLD and MAX/MIN function, the record data still real reading.*

Clear Memory



When the memory are full or want to clear memory data, please follow the setup to clear memory.


Press and hold  key into the setting mode, as shown in figures.

Press  and  key to select the clear memory mode.

Press  key into the clear memory mode.


The LCD showed the “yes” to reconfirm.

Press  key to leave or press  key to clear memory and leave clear memory mode.

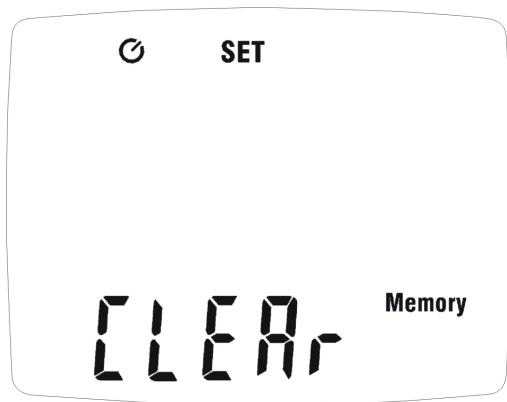



Memory Recall


Users can recall the memory data to show on the display.

Press and hold  key into the RECALL mode.


The secondary display showed the memory location and primary display showed the storage

velocity data.

Press  and  key to **increase and decrease memory location.**

If want to leave the recall mode, please press and hold  key to leave this mode.

Checking the LCD and Software Version

In the shutoff mode, Press and hold  key to turn on device and LCD will keep all dark continued.

Starting device will show the software version about 1 second.

Battery Replacement

Turn off the device and disconnect all test leads



WARNING

If the symbol " " appears on the LCD, please replace the battery immediately

before replacing the battery.

Use only the correct type of batteries, properly installed in the case, to power the device.

Specifications

Velocity:

Unit	Range	Resolution	Accuracy
m/s	0.4~25	0.1	$\pm 2\% + 0.2$
Km/hr(kph)	1.5~90	0.1	$\pm 2\% + 0.8$
mph	0.9~55	0.1	$\pm 2\% + 0.4$
Knots(kts)	0.8~48	0.1	$\pm 2\% + 0.4$
ft/min(fpm)	79~4921	1	$\pm 2\% + 40$
Beaufort	1~10	1	--

Air Flow Calculation:

Unit	Range	Resolution	Accuracy
CMM	0~9999	1	--
CFM	0~9999	1	--

Temperature:

Unit	Range	Resolution	Accuracy
<input type="checkbox"/>	-20~60	0.1	±1□
<input type="checkbox"/>	-4~140	0.1	±1.8□

Humidity:

Unit	Range	Resolution	Accuracy
%RH	20~80	0.1	±3.5%RH
%RH	<20 , >80	0.1	±5%RH

Absolute Pressure:

Unit	Range	Resolution	Accuracy
hPa	350~1100	0.1	±2hPa
mmHg	263~825	0.1	±1.5mmHg
inHg	10.3~32	0.1	±0.1

- Display: 42mm(W)*33mm(L) Monochrome LCD with backlight
- Battery: 9V (NEDA 1604□IEC 6F22 or JIS 006P)
- Battery Life: Approx continuous used 100 hours.
- Shutoff Rate Power: 3uA
- Operate Maximum Power: 25mA
- Operating temperature and humidity: 5□ to 40□, below 80% RH.
- Storage temperature and humidity: -10□ to 60□, below 70%.
- Instrument dimensions: 130(L)*56(W)*38(H) mm. Weight: About 160g.
- Probe dimensions: 195(L)*47(W)*30(H) mm. Cable length: 95cm. Weight: About 100g.
- Accessories: User's manual x1, 9V battery

x1, Probe x1, Bag x1

End of life



Caution: This symbol indicates that equipment and its accessories shall be subject to a separate collection and correct disposal

TENMARS ELECTRONICS CO., LTD
6F, 586, RUI GUANG ROAD, NEIHU,
TAIPEI 114, TAIWAN.

E-mail: service@tenmars.com

<http://www.tenmars.com>